


## 32" FloodSaver Surround

WMWP Wall Unit  
WMB32 Base  
WMBD32 Base (drainless)<sup>1</sup>

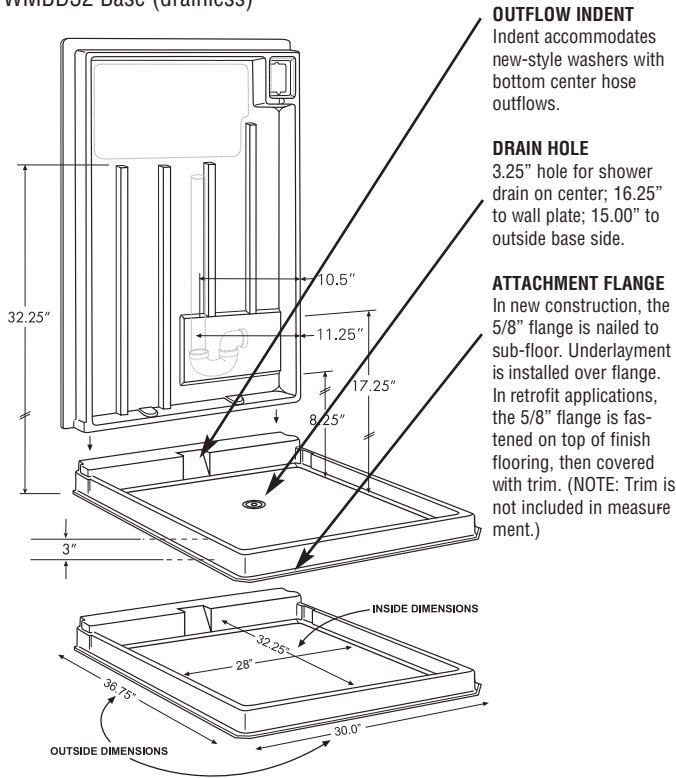


**OUTFLOW INDENT**  
Indent accommodates new-style washers with bottom center hose outflows.

**DRAIN HOLE**  
3.25" hole for shower drain on center; 16.25" to wall plate; 15.00" to outside base side.

**ATTACHMENT FLANGE**  
In new construction, the 5/8" flange is nailed to sub-floor. Underlayment is installed over flange. In retrofit applications, the 5/8" flange is fastened on top of finish flooring, then covered with trim. (NOTE: Trim is not included in measurement.)

## 27" FloodSaver Surround

WMWP Wall Unit  
WMB27 Base  
WMBD27 Base (drainless)<sup>1</sup>

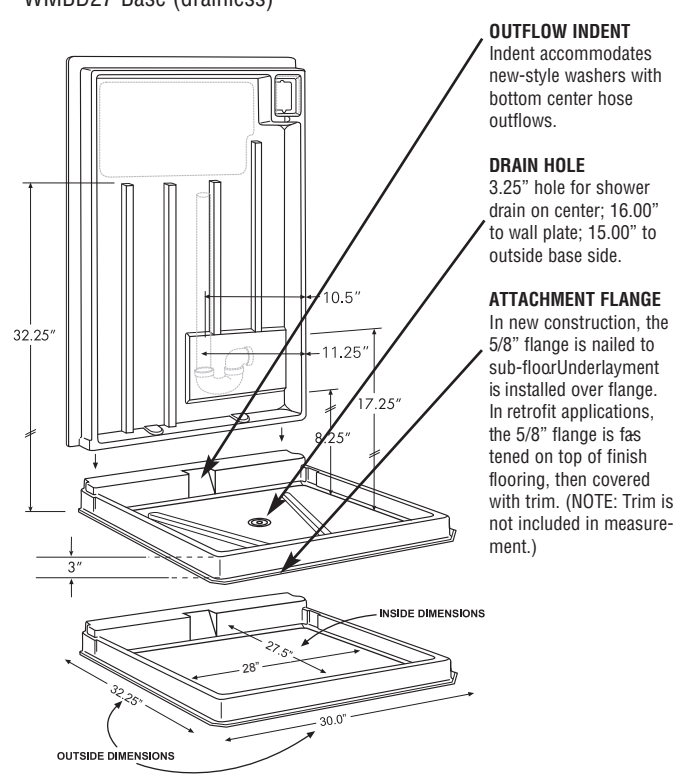

**OUTFLOW INDENT**  
Indent accommodates new-style washers with bottom center hose outflows.

**DRAIN HOLE**  
3.25" hole for shower drain on center; 16.00" to wall plate; 15.00" to outside base side.

**ATTACHMENT FLANGE**  
In new construction, the 5/8" flange is nailed to sub-floor. Underlayment is installed over flange. In retrofit applications, the 5/8" flange is fastened on top of finish flooring, then covered with trim. (NOTE: Trim is not included in measurement.)

### OUTSIDE DIMENSIONS:<sup>2</sup>

Height: 46.75" (does not include flange)  
Width: 30.00" (does not include flange)  
Depth: 36.75" (pan front to back, does not include flange)

### INSIDE BASE DIMENSIONS:

Width: 28" (approximately)  
Depth: 32.25" (approximately)  
Capacity: 10.47 gallons (approximately)

**NOTE:** Valves, shower drains, pipe/trap and electrical outlets not included.

### SUGGESTED SPECIFICATION:

Washing machine surround shall be FloodSaver® model \_\_\_\_\_ or equal; 2-piece system to consist of formed high-density polyethylene (UL 94 G60-25-144) base and wall panel. Base shall form a minimum 3" deep containment pan and shall accommodate a standard shower-type drain. Wall panel shall provide minimum 3" spray barrier on sides and top.

<sup>1</sup>WMBD32 Drainless Base is used in applications where a floor joist or other obstruction requires flexibility in drain placement.

<sup>2</sup>Washing machine measurements can be deceiving. Nearly all US-made washing machines fit comfortably in a FloodSaver even though their measurements may not so indicate. If the machine is available, measure its width and depth at about 4 to 5 inches above the floor.

### OUTSIDE DIMENSIONS:<sup>2</sup>

Height: 46.75" (does not include flange)  
Width: 30.00" (does not include flange)  
Depth: 32.25" (pan front to back, does not include flange)

### INSIDE BASE DIMENSIONS:

Width: 28" (approximately)  
Depth: 27.50" (approximately)  
Capacity: 9.0 gallons (approximately)

**NOTE:** Valves, shower drains, pipe/trap and electrical outlets not included.

### SUGGESTED SPECIFICATION:


Washing machine surround shall be FloodSaver® model \_\_\_\_\_ or equal; 2-piece system to consist of formed high-density polyethylene (UL94 G60-25-144) base and wall panel. Base shall form a minimum 3" deep containment pan and shall accommodate a standard shower-type drain. Wall panel shall provide minimum 3" spray barrier on sides and top.

<sup>1</sup>WMBD27 Drainless Base is used in applications where a floor joist or other obstruction requires flexibility in drain placement.

<sup>2</sup>Washing machine measurements can be deceiving. Nearly all US-made washing machines fit comfortably in a FloodSaver even though their measurements may not so indicate. If the machine is available, measure its width and depth at about 4 to 5 inches above the floor.

## Washing Machine Pan

For 24"x24" single (European standard) or stackable washer/dryer

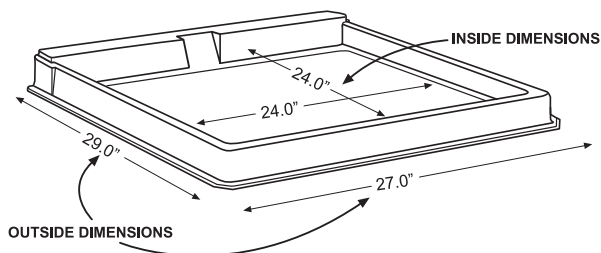

### NAILING FLANGE

In new construction, the 5/8" flange is nailed to sub-floor. Underlayment is installed over flange.

In retrofit applications, the 5/8" flange is fastened on top of finish flooring, then covered with trim. (NOTE: Trim is not included.)

### SUGGESTED DRAIN HOLE PLACEMENT

One (1) 3.25" hole for standard shower drain. Position hole in any logical location. **NOTE: Valves, shower drains, pipe/trap are not included.**

## Model WMBD24

For New Construction and Retrofit

### INSIDE BASE DIMENSIONS:

24" X 24" (approximately)  
Capacity: 6.86 gallons (approximately)

### OUTSIDE DIMENSIONS:

Height: 3" (floor to top of rim)  
Width 27.00"  
Depth: 29.00" (front to back).  
Dimensions do not include flange.

**SUGGESTED SPECIFICATION:** Washing machine pan shall be FloodSaver® model \_\_\_\_\_ or equal; 1-piece system to consist of formed high-density polyethylene base. Base shall form a minimum 3" deep containment pan and shall accommodate a standard shower-type drain.

Product of:




P.O. Box 1782  
Stanwood, WA 98292  
(360) 629-9269  
FAX: (360) 629-2838  
ORDERS: (866) 341-7674

www.floodsaver.com

## Slide-N-Fold

A versatile water protection system for dishwashers, air conditioning units and other household appliances.

Slide-N-Fold is designed to protect homes, apartments and condominiums by minimizing the risk of flooding by appliances that are located under counters or in difficult-to-reach locations. Delivered flat, the unit is folded to form a water-tight pan using eight simple screws. Prior to installation the sides and back of the unit are assembled, leaving the front side "open." After the unit is positioned and a drain is installed, the appliance is slid onto the unit. Then the front of the unit is folded into place, forming an effective protection against appliance leaks and floods. The screws can be removed later as needed for appliance maintenance.

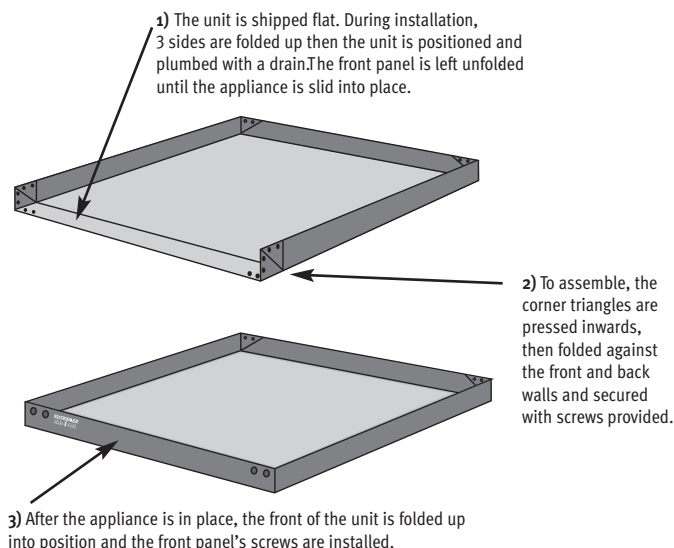

## Slide-N-Fold All-Purpose Folding Pan Approximate Dimensions

Model #	APFP2424	APFP2426	APFP2729	APFP2732	APFP3021
<b>Nominal Dimensions</b>					
Width (side to side)	24"	24"	27"	27"	30"
Depth (front to back)	24"	26"	29"	32"	21"
Approximate Capacity	5.0 gallons	5.0 gallons	7.6 gallons	8.4 gallons	7.5 gallons

**COLOR:** Black

**NOTE:** Drains and pipe/trap are not included.

**SUGGESTED SPECIFICATION:** Water containment system shall be FloodSaver® Slide-N-Fold Pan or equivalent. 1-piece system to consist of formed high-density polypropylene. Unit shall form an approximately 2" deep containment pan and shall accommodate a standard shower-type or sink-type drain.